
Bonding dissimilar material: Polyethylene & Wooden Products

powered by PaintFlex®

PaintFlex® is the liquid paint that can be applied directly to the surface of polyethylene & other hard to paint products.

12.Sep.2026

Bonding polyethylene products painted with PaintFlex® to wooden products coated with standard paint.

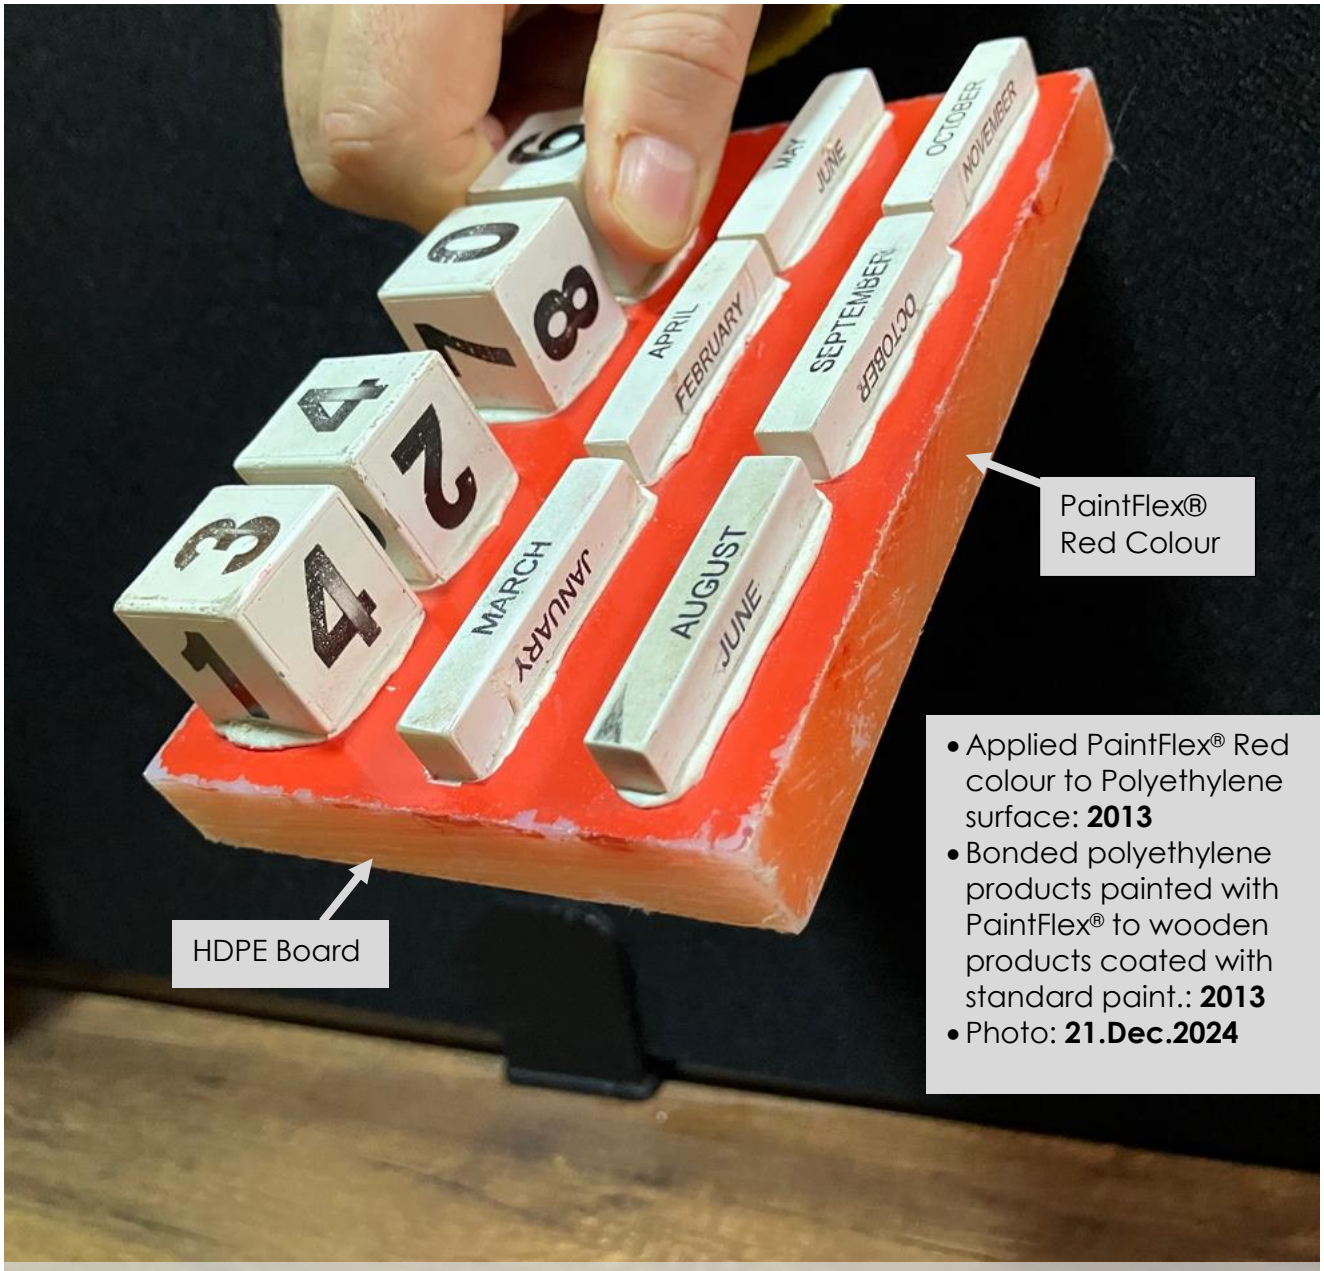

How to Bond:

Step 1. Apply PaintFlex® to the surface of the HDPE product to which you want to bond painted wooden products.

Step 2. Wait minimum 24hours (There is no time limit on the maximum waiting time.)

Step 3. Apply elastic adhesive like CaulkingFlex® between Polyethylene products painted with PaintFlex® to wooden products coated with standard paint.

You do **NOT** need to these methods for paint on HDPE Products:

- ⦸ Heat, Flame, Corona, Plasma and other heat related treatments
- ⦸ Primer for PaintFlex® Liquid Paint